

座厕的安装

Victoria 维多利亚(400mm)

概述

冲水方式	冲落式
安装方式	落地安装
排水方式	底排 (标准配置)
冲水量	6L/3L

适用规格

地面排水坑距	400mm
进水接口	G1/2"
适用水压	0.5bar-7.5bar

盖板匹配	缓降型/普通型
按键操作	双键顶按式

产品组成型号




水箱	3434A2..0 (含水件)
底座	3424B5..0 (400mm)

座厕盖板

普通型	80N010..1
缓降型	80N012..1





环保节水



产品配件


1. 822043001
2. 8220103N0
3. 822026000
4. 822901000
5. 388396000
6. 8220230N0
7. 1830506CN
8. 1830406CN
9. 1830506CN
10. 1860200CN

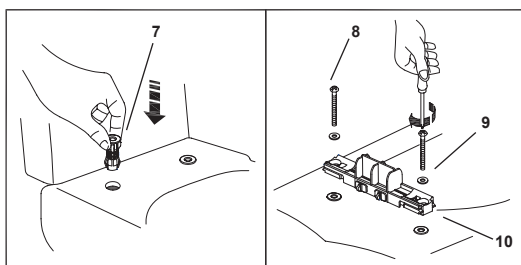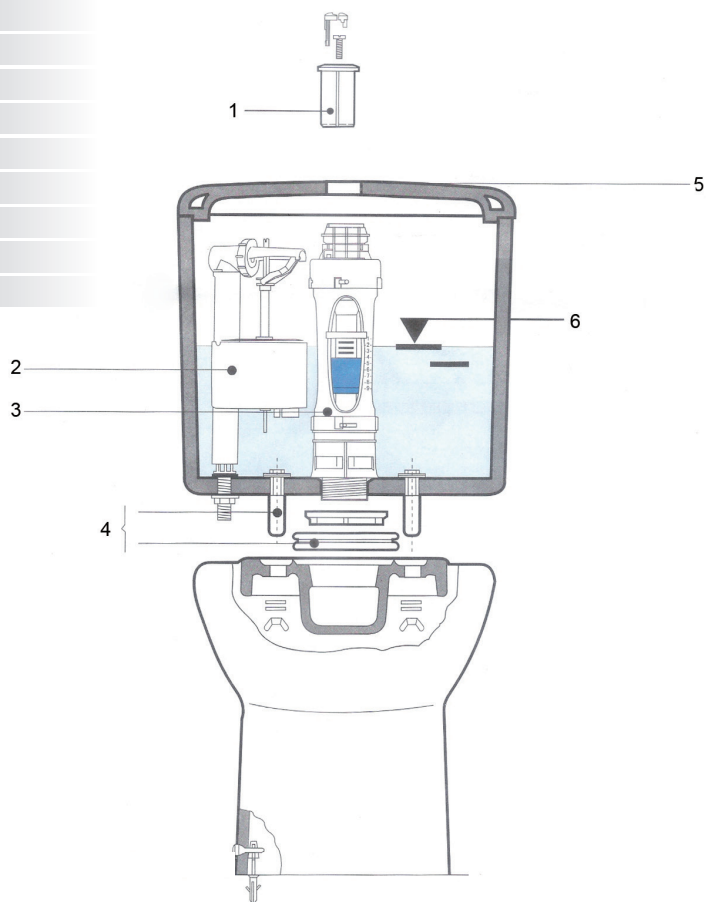


座厕的安装

Victoria 维多利亚(400mm)

安装开始

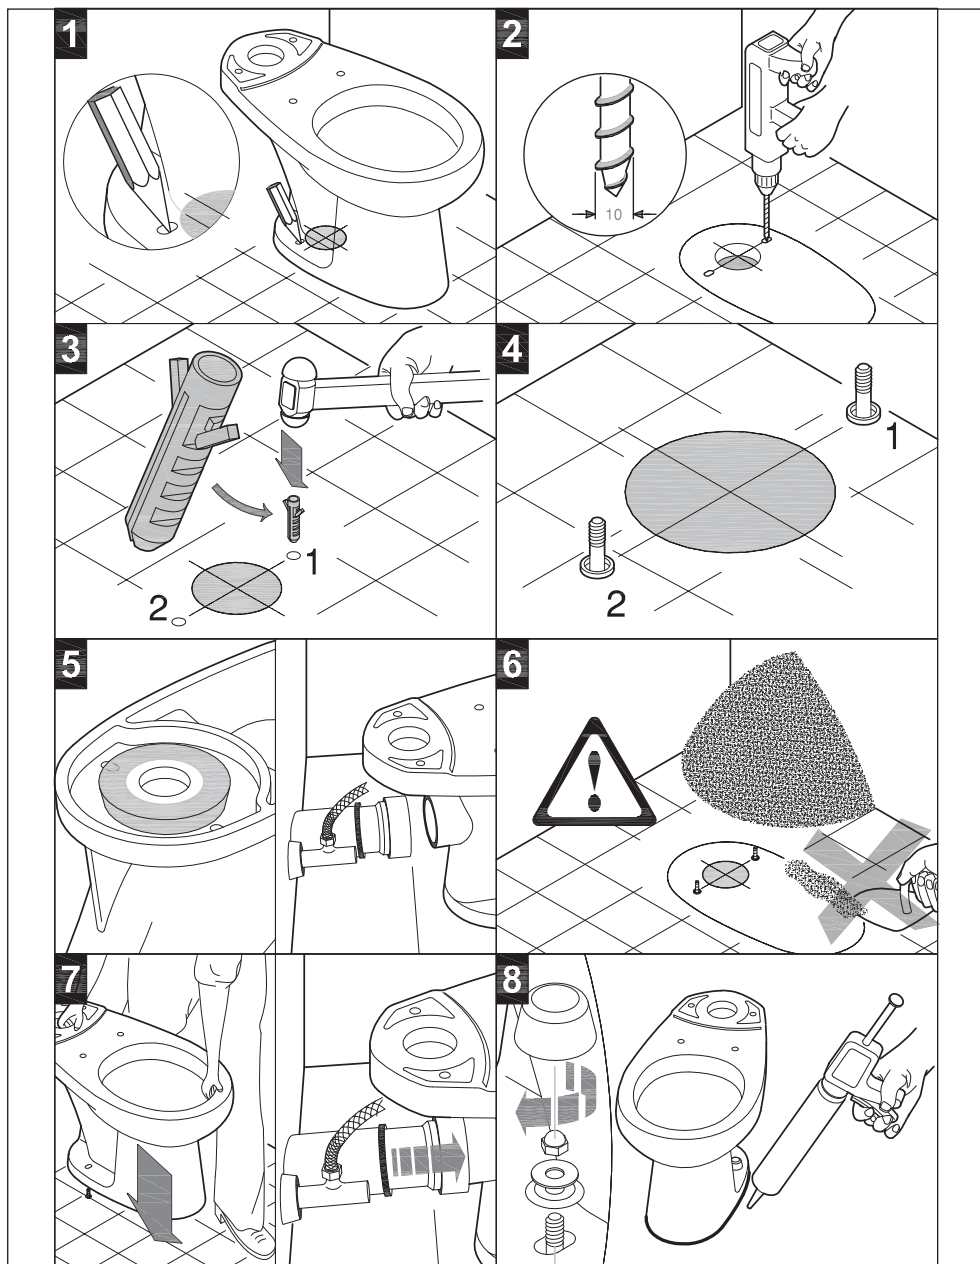


水件安装

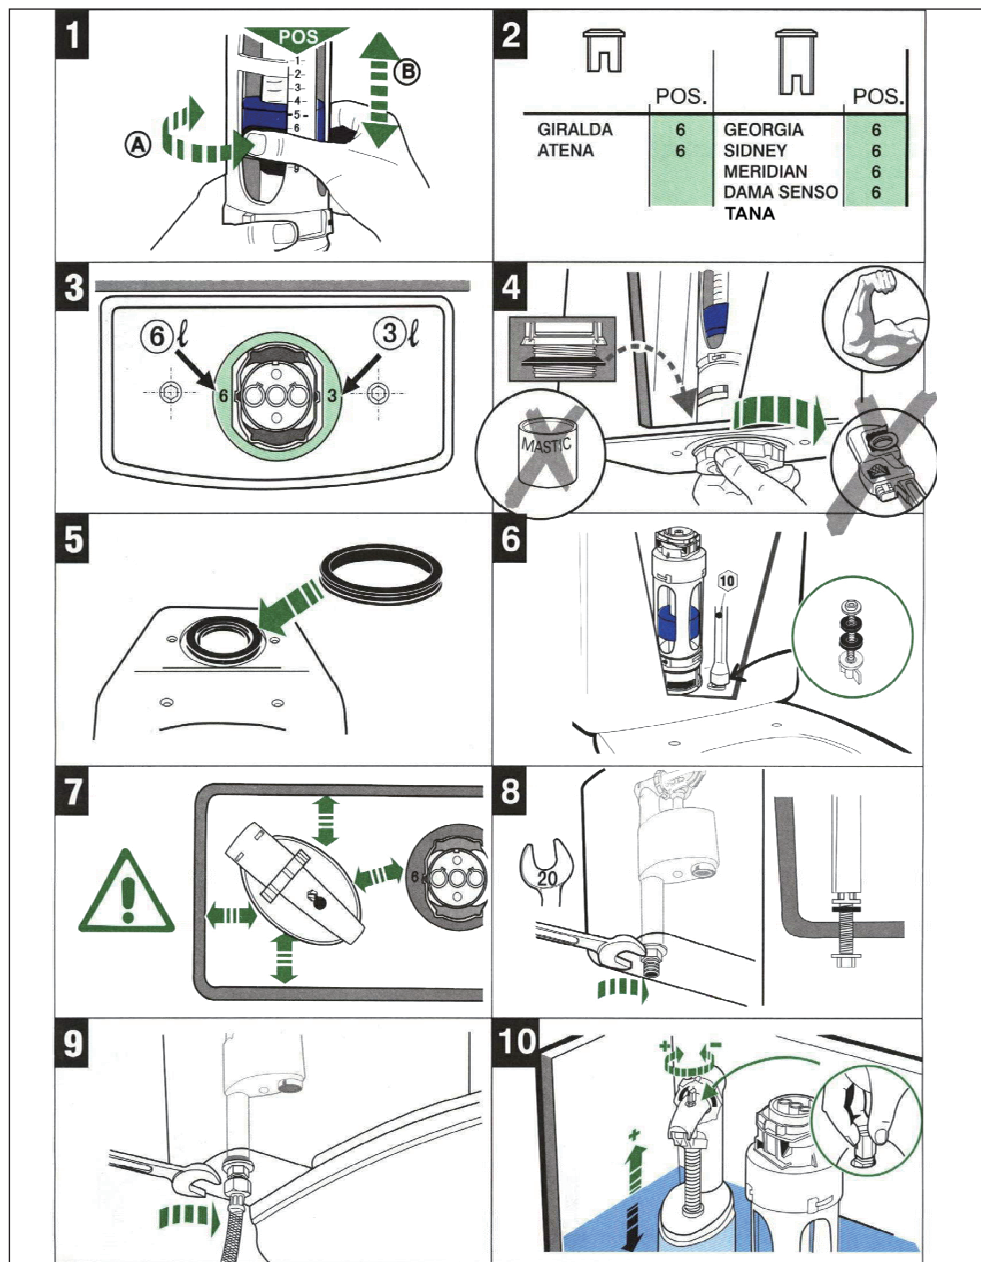










座厕的安装

Victoria 维多利亚(400mm)

水件安装

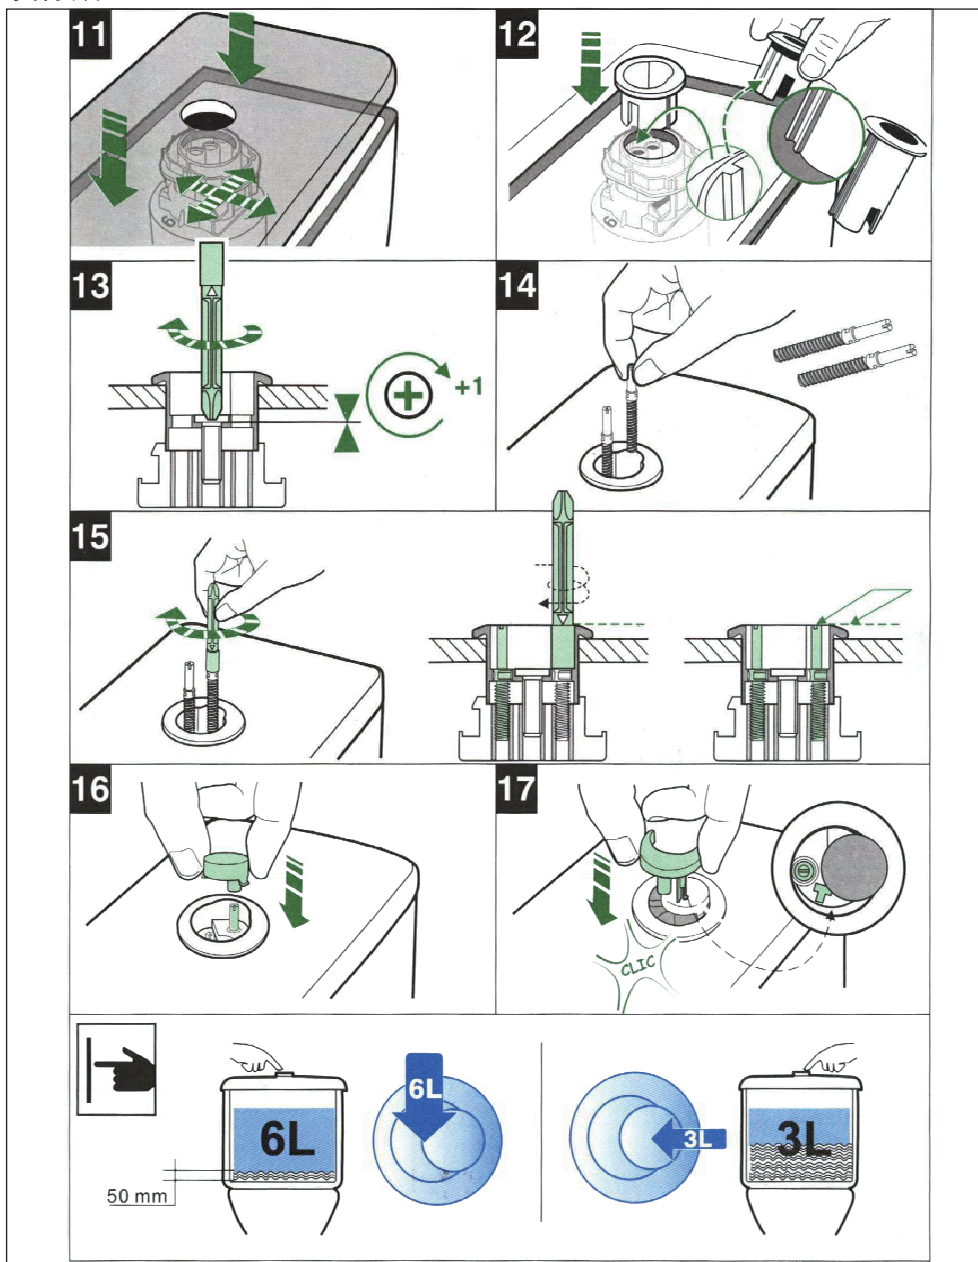


水件维护

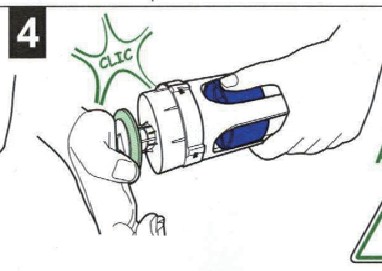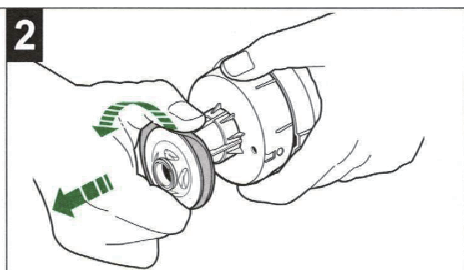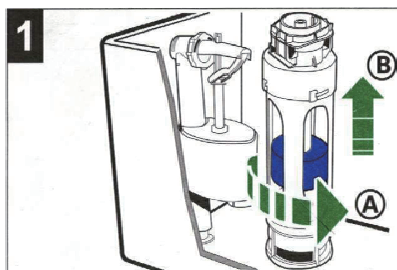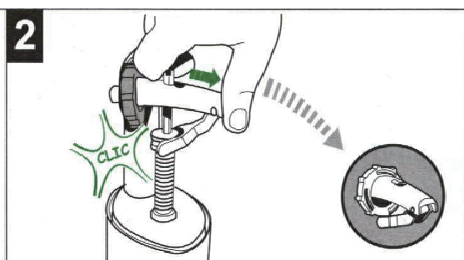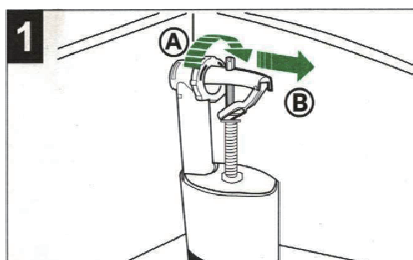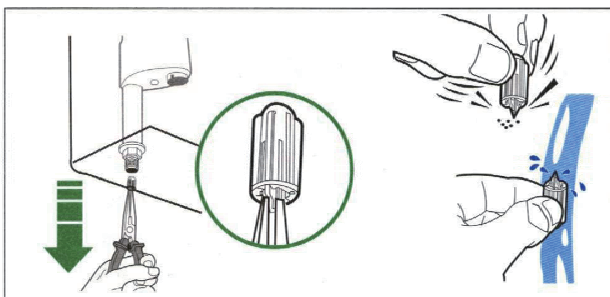


座厕的安装

Victoria 维多利亚(400mm)

盖板安装

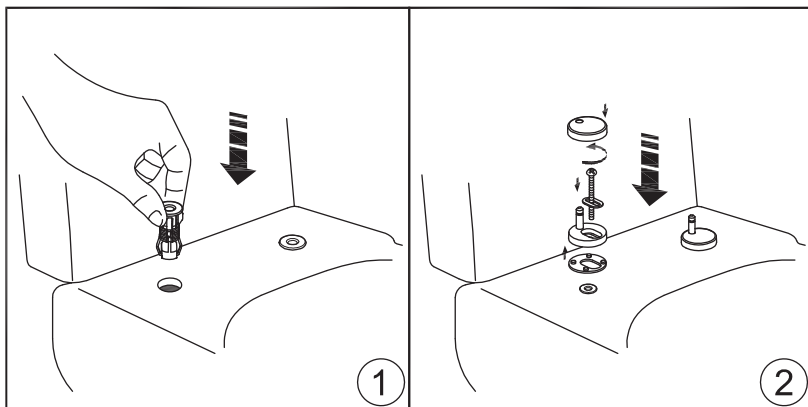

将膨胀套钉压入孔内，安装螺钉将支座固定在陶瓷体上稳固。

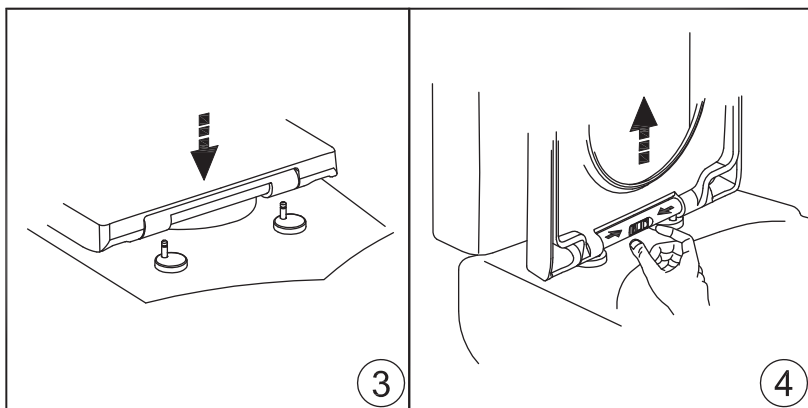

将盖板由上至下落下，使支座插入盖板铰链套内即可。

拆卸时，拨动盖板后部的锁扣，将盖板向上提起即可拆下。