

座厕的安装

Nexo 尼梭(分体)

概述

冲水方式	冲落式
安装方式	落地安装
排水方式	底排（标准配置） 横排（特殊配置）
冲水量	3L/6L

适用规格

地面排水坑距	305mm
进水接口	G1/2"
适用水压	0.5bar-7.5bar


盖板匹配	缓降型/普通型
按键操作	双键顶按式
附属匹配	可配用ROCA电子洁身器

产品组成型号




水箱	341610..0（含水件）
底座	342616..0

座厕盖板

普通型	80N616..1
缓降型	80N612..1


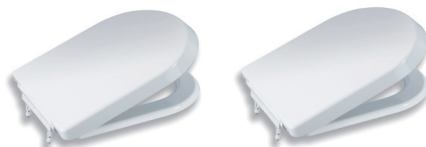


环保节水



产品配件


- 1. 822044001
- 2. 8220103N0
- 3. 822026000
- 4. 527003010
- 5. 388610000
- 6. 8220230N0
- 7. 1830506CN
- 8. 1830406CN
- 9. 1830506CN
- 10. 1860200CN
- 11. 892009000

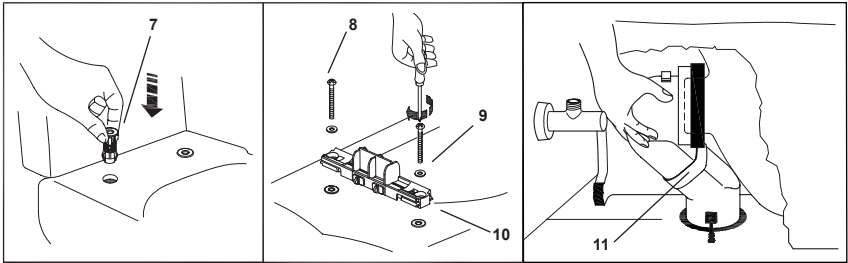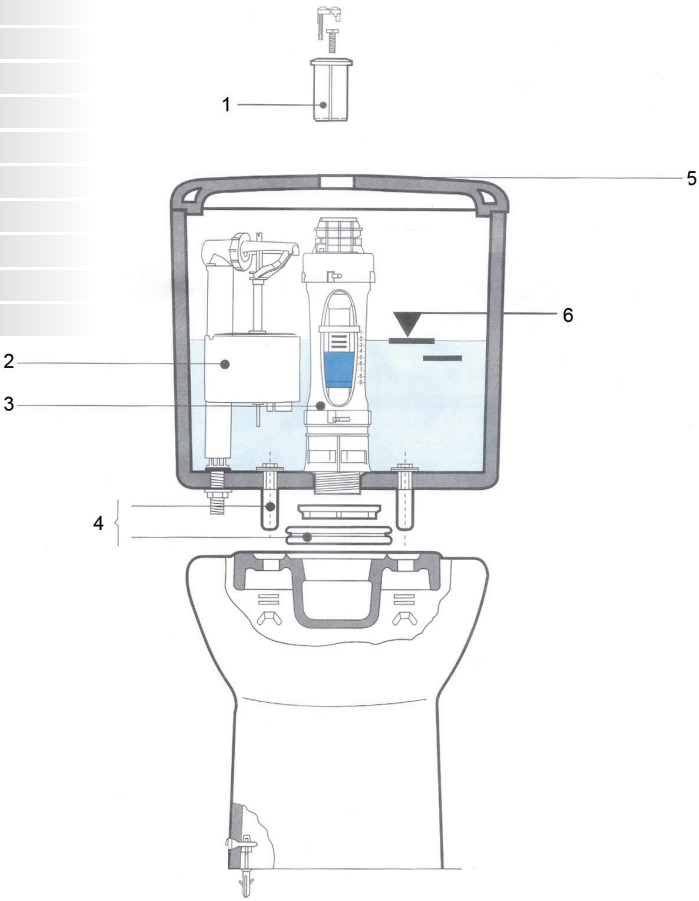


座厕的安装

Nexo 尼梭(分体)

安装开始

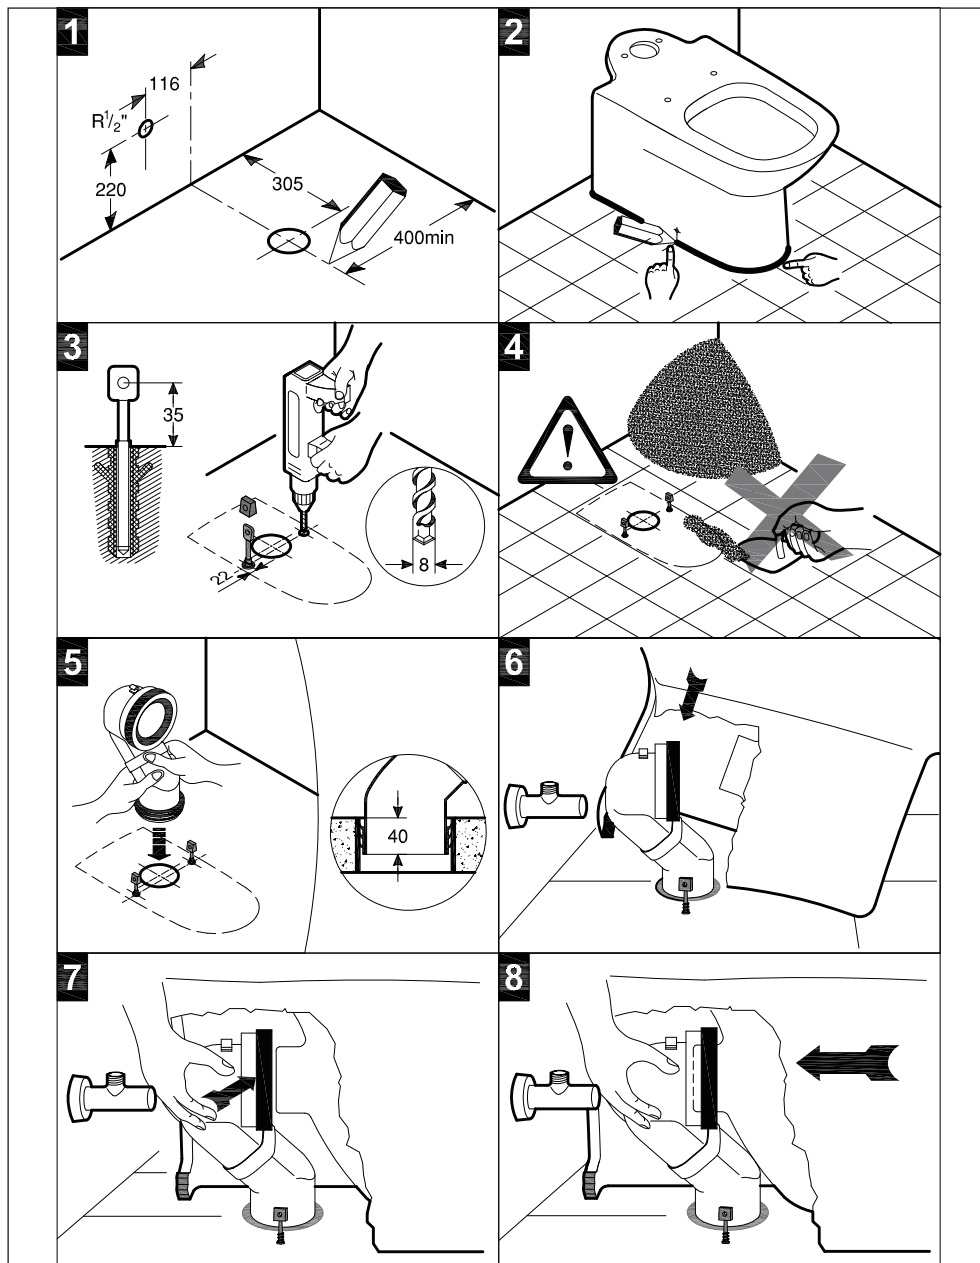


水件安装

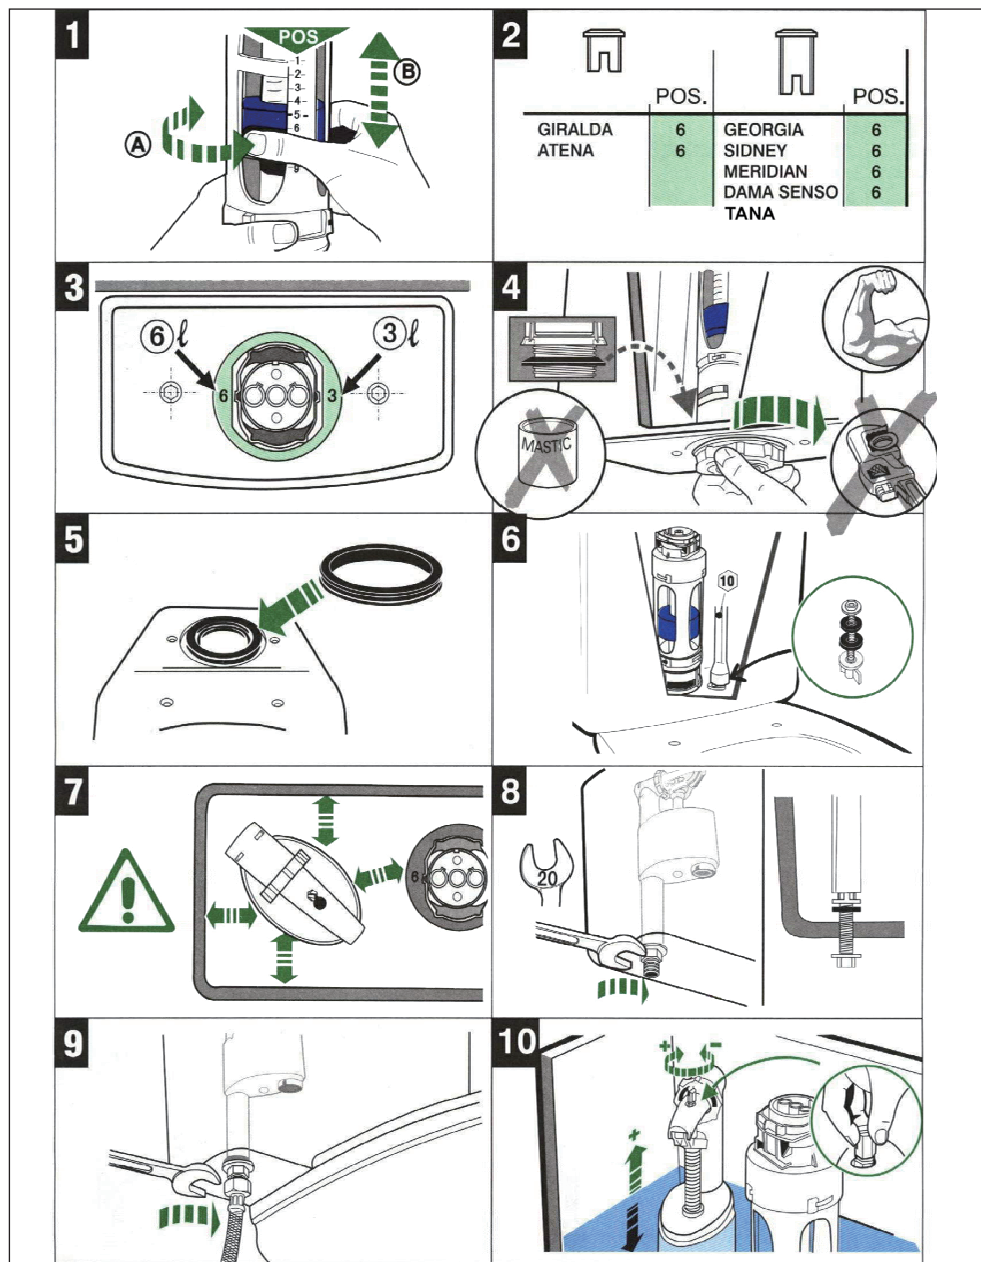










座厕的安装

Nexo 尼梭(分体)

水件安装

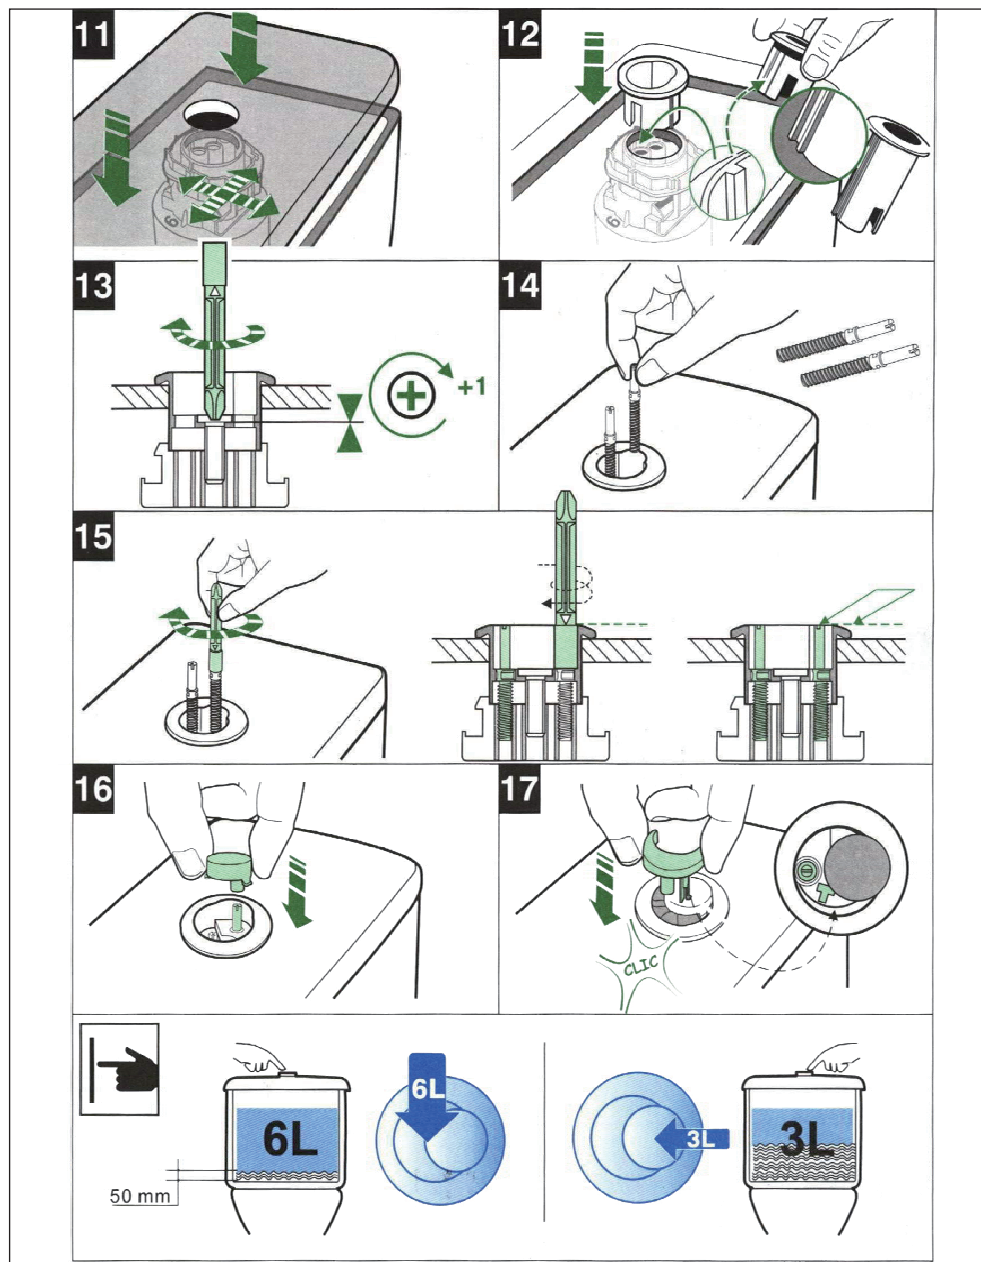



水件维护

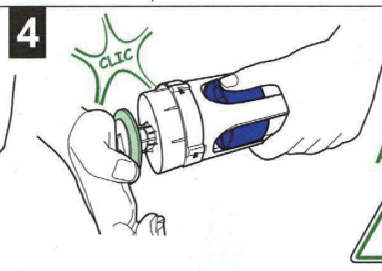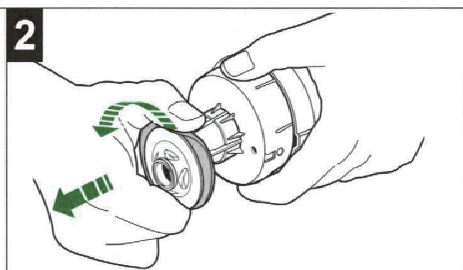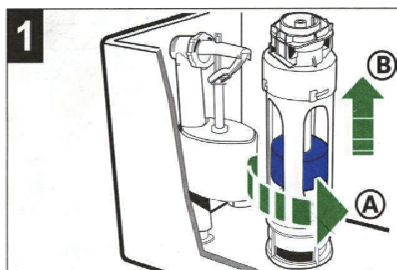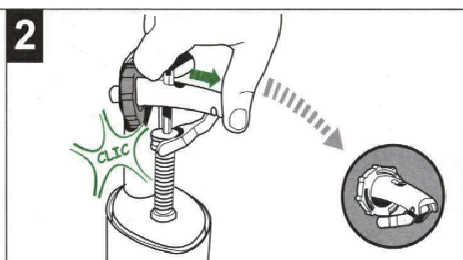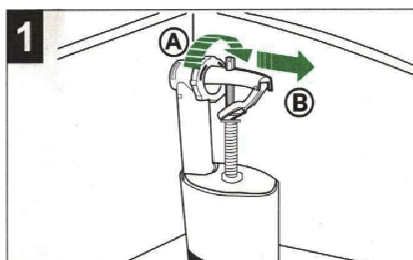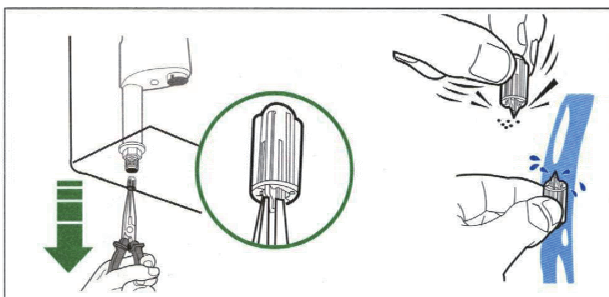



座厕的安装

Nexo 尼梭(分体)

盖板安装

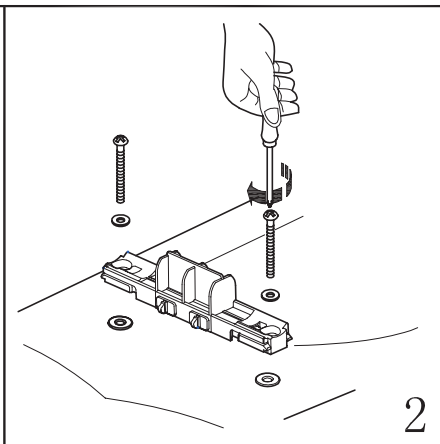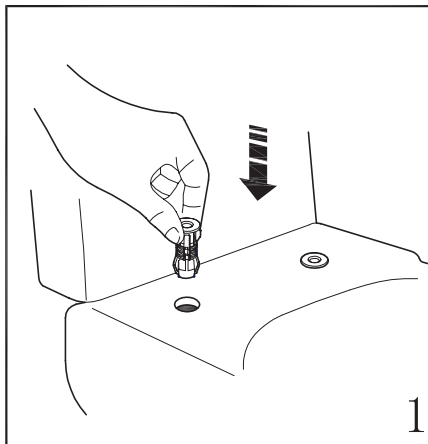

将膨胀套钉压入孔内，安装螺钉将支座固定在陶瓷体上稳固。

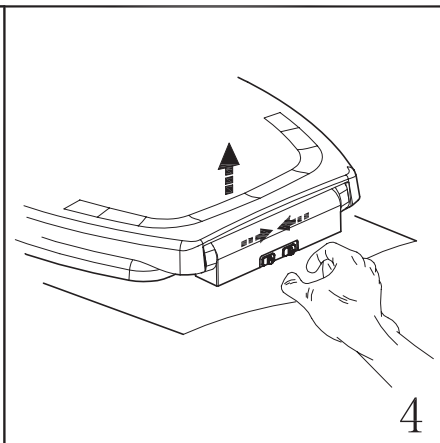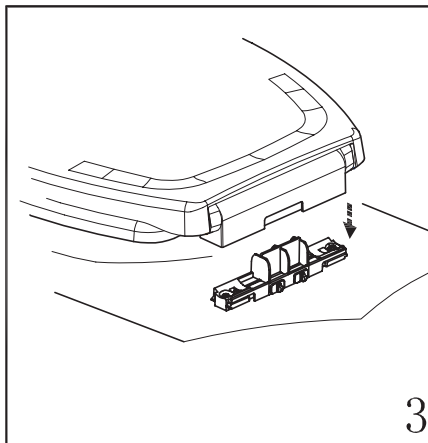

将盖板由上至下落下，使支座插入盖板铰链套内即可。
拆卸时，拨动盖板后部的锁扣，将盖板向上提起即可拆下。